

PRVPATENT- OCH REGISTRERINGSVERKET
Patentavdelningen**Intyg
Certificate**

REC'D 03 AUG 2004

WIPO

PCT

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.

(71) Sökande AMC Centurion AB, Åkersberga SE
Applicant (s)

(21) Patentansökningsnummer 0302054-2
Patent application number

(86) Ingivningsdatum 2003-07-11
Date of filing

Stockholm, 2004-07-23

För Patent- och registreringsverket
For the Patent- and Registration Office

Anita Södervall

Avgift
Fee

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

**PATENT- OCH
REGISTRERINGSVERKET
SWEDEN**

Postadress/Adress
Box 5055
S-102 42 STOCKHOLM

Telefon/Phone
+46 8 782 25 00
Vx 08-782 25 00

Telex
17978
PATOREG S

Telefax
+46 8 666 02 86
08-666 02 86

ANTENNA DEVICE AND PORTABLE RADIO COMMUNICATION
DEVICE COMPRISING SUCH ANTENNA DEVICE

5 FIELD OF INVENTION

The present invention relates generally to antenna devices and more particularly to an antenna device for use in a radio communication device, such as a mobile phone, which is adapted for radio signals having a relatively low frequency, such as radio signals in the FM band.

BACKGROUND

Internal antennas have been used for some time in portable radio communication devices. There are a number of advantages connected with using internal antennas, of which can be mentioned that they are small and light, making them suitable for applications wherein size and weight are of importance, such as in mobile phones.

20 However, the application of internal antennas in a mobile phone puts some constraints on the configuration of the antenna element. In particular, in a portable radio communication device the space for an internal antenna arrangement is limited. These constraints may make it difficult to find a configuration of the antenna that provides for a wide operating band. This is especially true for antennas intended for use with radio signals of relatively low frequencies as the desired physical length of such antennas are large compared to antennas operating with relatively high frequencies.

One specific application operating in a relatively low frequency band is the FM radio application. The FM band is defined as frequencies between 88-108 MHz in Europe or between 76-110 MHz in the USA. Conventional antenna configurations, such as loop antennas or monopole antennas, fitted within the casing of a portable radio communication device will result in unsatisfactory operation in that the antenna either has too bad performance over a sufficiently wide frequency band or sufficient performance over a too narrow frequency band.

Instead, a conventional FM antenna for portable radio communication devices is provided in the headset wire connected to the communication device. This configuration with a relatively long wire permits an antenna length that is sufficient also for low frequency applications. However, if no external antenna is permitted this solution is obviously not feasible.

SUMMARY OF THE INVENTION

20 An object of the present invention is to provide an internal antenna device for use in a portable radio communication device, which operates with sufficient performance throughout a frequency band having a relatively low frequency, such as the FM radio band.

25 Another object of the present invention is to provide such an antenna device involving few components.

The invention is based on the realisation that an antenna can be provided inside the casing of a portable radio communication device, which has good

performance throughout a narrow sub-band of a frequency band having a relatively low frequency, and that the narrow sub-band can be adjusted in frequency so as to cover the entire frequency band.

- 5 According to the present invention there is provided an antenna device as defined in appended claim 1.

By providing a controllable electrical impedance in the radiating element, the range of a relatively narrow resonance frequency band can be adjusted,
10 thereby providing for a small sized antenna device operating in a relatively low frequency band.

There is also provided a radio communication device comprising such an antenna device.

- In a preferred embodiment, the antenna device comprises a receiver circuit, wherein the at least one
15 feeding portion of the radiating element is connected to a feeding input on the receiver circuit, and wherein the control input of the controllable electrical impedance is connected to an output on the receiver
20 circuit intended for the control of the VCO resonance frequency of the receiver circuit. This provides for a solution involving very few components because the same signal that is already used for controlling the
25 resonance frequency of the receiver circuit is also used for controlling the operating frequency band of the antenna device

Further preferred embodiments are defined in the dependent claims.

BRIEF DESCRIPTION OF DRAWINGS

The invention is now described, by way of example,
with reference to the accompanying drawings, in which:

FIG. 1 is an schematic diagram showing an antenna
5 device according to the invention having a variable
impedance;

FIG. 2 is a diagram similar to the one of FIG. 1 but
showing a variable capacitance;

FIG. 3 is a diagram showing in more detail an antenna
10 device according to the invention connected to an FM
receiver circuit;

FIG. 4 is a diagram similar to the one of FIG. 3 but
with an alternative embodiment of the antenna device
according to the invention;

15 FIG. 5 is a perspective view, partially in section, of
an antenna device according to the invention mounted
in a portable radio communication device;

FIG. 6 is a perspective view showing an alternative
antenna configuration in a portable radio
20 communication device;

FIG. 7 is a plan view showing the positioning of yet
an alternative embodiment of the antenna device
according to the invention in a portable radio
communication device.

25 DETAILED DESCRIPTION OF THE INVENTION

In the following, a detailed description of preferred
embodiments of an antenna device and a portable radio

communication device according to the invention will be given. In the several embodiments described herein, the same reference numerals are given to identical parts of the different embodiments.

- 5 In the following description and claims, the term radiating element is used. It is to be understood that this term is intended to cover electrically conductive elements arranged for receiving and/or transmitting radio signals. Also, by the term feeding device should
10 be understood any device that can receive and/or transmit signals from/to a radiating element.

First with reference to fig. 1, the general configuration of an antenna device according to the invention is shown, in this case a loop antenna. The
15 antenna, generally designated 1, comprises a loop of thin electrically conductive wire. First and second feeding portions 21 and 22 are connected to the loop and are adapted for connection to a feeding device. The feeding can be either balanced or unbalanced. In
20 the case of unbalanced feed, the second feeding portion 22 is connected to a ground plane, such as a conductive area on a PCB, which will have the effect of a stub match. This feeding arrangement provides for a T-match network, which increases the radiation
25 resistance. Also, a loop antenna is relatively stable and does not detune easily, which is an advantage in a portable radio communication device which is operated in different locations and orientations etc.

The antenna volume in a portable radio communication
30 device is small, which results in a physically small

antenna compared to the wavelength. This leads to a non-resonant loop antenna and an electrical impedance 30 is provided somewhere in the radiating element to provide a resonant antenna in the desired frequency range. However, with a fixed impedance the antenna will operate with a relatively small bandwidth, such as about 1 MHz. In order to be able to cover the entire desired bandwidth, in the case of the FM band about 20 MHz, the impedance 30 is provided as a variable impedance, as indicated by the arrow in FIG. 1. The variable impedance functions as a tuning circuit by means of which the resonant frequency band of the antenna device 1 can be adjusted.

In a preferred embodiment shown in FIG. 2 the electrical impedance 30 is a varactor diode functioning as a variable capacitance.

An implementation of the general idea expressed in FIGS. 1 and 2 will now be described with reference to FIG. 3. The general configuration of the antenna device 1 is retained. Thus, it comprises a loop 10 of electrically conductive wire. The feeding portions 21 and 22 are connected to an FM receiver circuit 40 via a matching network 50, as is conventional. The variable capacitance 30, indicated by dashed lines in FIG 3, comprises a first capacitance 30a, a diode 30c, and a second capacitance 30b, all connected in series in the loop 10. A first inductance 30d is connected between the first capacitance 30a and the diode 30c. A second inductance 30e is connected between ground and the junction between the second capacitance 30b and the diode 30c. A control line 32 is connected to the

first inductance 30d, as will be described in more detail below, while the second inductance 30e is connected to ground.

The FM receiver circuit 40, which could be a conventional circuit manufactured by Philips Semiconductors and sold under the name HVQFN40, comprises two feeding inputs 40a, 40b which are connected to the antenna loop 10, as has been explained above. The FM receiver circuit 40 also comprises a VCO control output 40c which conventionally is used for controlling the resonance frequency of an external tuning circuit 42 which is used to get the correct resonance frequency for the receiver 40. In the preferred embodiment the tuning circuit comprises a voltage controlled oscillator (VCO), the frequency of which is controlled by means of a voltage applied to the VCO. A VCO control output 40c which is found on the FM receiver circuit 40 is connected to the VCO and a voltage is output from the output 40c so as to generate the correct VCO frequency for the desired operating frequency of the FM receiver circuit. The VCO is in turn connected to inputs 40d, 40e on the FM receiver circuit adapted to receive the correct resonance frequency for demodulating the received radio signal to base band frequency.

Besides being connected to the VCO 42, the VCO control output 40c is also connected to the varactor 30 via a control circuit 60 adapted to amplify or otherwise adapt the VCO control signal to the operation of the varactor 30. More specifically, the conditioned VCO control signal is applied to the first inductance 30d of the varactor via the control line 32. With correct

adaptation of the VCO control signal, the antenna device 1 will exhibit an operating frequency range that corresponds to the current operating frequency range of the FM receiver circuit 40, i.e., the frequency range determined by the current VCO resonance frequency. The adaptation of the VCO control signal and the choice of values for the components 30a-e are within the skills of the person skilled in the art.

This embodiment uses the general idea of having a relatively narrow-banded antenna device with an operating band that is adjustable by means of an adjustable impedance in the antenna, in this case an adjustable capacitance. The arrangement shown in FIG. 3 comprises very few components because the same signal, VCO control, that is already used for controlling the resonance frequency of the VCO 42 is also used for controlling the operating frequency band of the antenna device 1 so that it follows the operating frequency band of the FM receiver circuit 40.

FIG. 4 shows an antenna device arrangement similar to that shown in FIG. 3 but with a different variable impedance designated 30' and shown within dashed lines. Thus, between the connection points of the feeding portions 21, 22 in the loop there is provided a capacitance 30f. Between the first feeding portion 21 and the control circuit 60 there is provided an first inductance 30g while a second inductance 30h is provided between the second feeding portion 22 and ground. This provides for a controllable impedance in the loop antenna.

It is often preferred to mount components on a PCB. Thus, in the example of FIG. 4, all components 30f-h could be mounted on a PCB, while just the diode 30c is fitted in the radiating element 10.

- 5 A preferred position of the antenna device according to the invention will now be described with reference to FIG. 5, wherein the general outlines of the casing of a portable radio communication device 200, such as a mobile phone, is depicted. The casing is shown
10 partially cut away so as to not obscure the position of the antenna device, which could be the device shown in FIG. 3.

- A printed circuit board (PCB) 210 is provided in the casing, having the circuits (not shown) conventionally
15 found in a mobile phone. On the PCB there is also mounted the FM receiver circuit 40. In the upper portion of the casing there is provided an antenna element 220 for receiving and transmitting RF signals for a mobile phone system, such as a GSM system.

- 20 A battery package 230 is also provided towards the back of the casing 200. This battery package is connected to the PCB by means of connectors (not shown). Arranged on the back surface of the battery package is the antenna device 1, preferably provided
25 as a conductive flexible film attached to the package. The feeding portions of the antenna device are connected to the PCB in the same way as the battery, i.e., through connectors arranged on the battery package and co-operating with corresponding connectors
30 on the PCB.

By providing the FM antenna 1 on the battery package, a sufficient distance between the FM antenna and the mobile phone antenna 220 is obtained so as to avoid interference there between.

5 An alternative antenna configuration is shown in FIG. 6. The radiating element 10' of a monopole or loop antenna is arranged in several turns outside of the edge of the PCB 210 so as to occupy as little area as possible. It is thus provided along the inside of the
10 casing 200. A controllable electric impedance 30 is arranged somewhere in the monopole antenna so as to make the operating frequency range adjustable. The antenna is connected to the FM receiver circuit 40 in some suitable way. By providing an antenna in several
15 turns, a very long physical length can be obtained in a small area.

In yet an alternative embodiment shown in FIG. 7 the antenna device is provided with a radiating element in the form of a spiral antenna 10''. This antenna
20 pattern is provided on the back side of the battery package 230 mounted in the casing 200 of the portable radio communication device. A spiral antenna pattern provides a relatively broad frequency band and also has an impedance that is suitable for the receiver,
25 about 200 Ohms. With a spiral antenna, the matching network 50 shown in FIGS. 3 and 4 could be omitted.

Also, there are many alternative ways of feeding a spiral antenna. Thus, it could be fed as a monopole or a dipole antenna. It could be fed at the inner end,

i.e., the end in the centre of the device, or at the outer end.

A way of shortening the physical antenna length is to arrange any of the above described antenna patterns
5 above a dielectric material. This could be of great importance especially in small sized radio communication devices.

Preferred embodiments of an antenna device according to the invention have been described. However, the
10 person skilled in the art realises that these can be varied within the scope of the appended claims without departing from the inventive idea. Thus, although a control circuit 60 has been shown in the embodiment of FIG. 3, it will be appreciated that this control
15 circuit in some cases can be omitted.

It is realized that the shape and size of the antenna device according to the invention can be varied within the scope defined by the appended claims. Thus, the exact antenna configurations can be varied so as to
20 correspond to the shape of the radio communication device, desired performance etc.

In the described embodiments, the antenna device has been provided as a flexible film. Other manufacturing processes and materials can of course be used for the
25 antenna device.

The antenna device according to the invention has been shown provided on the back side of a battery package or around the PCB. It will be appreciated that there are alternative ways of placing the antenna device

according to the invention. Thus, it could be provided on the inside of the D-cover, on or below the PCB or between PCBs etc.

- 5 The controllable electrical impedance has been described as being somewhere in the radiating element itself. It will be appreciated that any means acting as a controllable electrical impedance for the radiating element could be used, also means that are not provided in the radiating element itself.
- 10 Although an antenna device for a portable radio communication device has been described with reference to its use in a mobile phone, it will be appreciated that the inventive idea is also applicable to other portable radio communication devices, also devices that
- 15 are portable but primarily intended for stationary use. Examples thereof could be small clocks, such as travel alarm clocks, or game consoles.

04
1
2
3
4
5
6
7
8
9
0

CLAIMS

- 5 1. An antenna device for a portable radio communication device adapted for receiving radio signals, said antenna device comprising
- an internal radiating element (10) comprising at least one feeding portion (21, 22) connectable to a
- 10 feeding device (40),
- characterised in that
- the radiating element (10) comprises an electrical impedance (30; 30'; 30'') that is controllable in dependence on the desired frequency range of the
- 15 received signals.
2. The antenna device according to claim 1, wherein the impedance (30; 30'; 30'') is a capacitive impedance.
3. The antenna device according to claim 2,
- 20 wherein the electrical impedance is a varactor diode (30).
4. The antenna device according to claim 1, wherein the impedance (30) is an inductive impedance.
5. The antenna device according to any of claims
- 25 1-4, wherein the radio signals for which the antenna device is adapted have a frequency below 110 MHz, preferably between 76 and 110 MHz, and even more preferably between 88 and 108 MHz.

6. The antenna device according to any of claims 1-5, wherein the radiating element is a loop (10).

7. The antenna device according to any of claims 1-6, wherein the radiating element (10') is arranged
5 in several turns.

8. The antenna device according to any of claims 1-7, further comprising a receiver circuit (40), wherein the at least one feeding portion (21, 22) is connected to a feeding input (40a, 40b) on the
10 receiver circuit, and

wherein the control input of the controllable electrical impedance (30) is connected to an output (40c) on the receiver circuit (40) intended for the control of the VCO resonance frequency of the receiver
15 circuit.

9. The antenna device according to any of claims 1-8, wherein the radiating element (10) is arranged on a battery package (230).

10. The antenna device according to claim 9,
20 wherein the radiating element (30) is connected to the receiver circuit (40) by means of connectors provided on the battery package (230).

11. The antenna device according to any of claims 1-10, wherein the radiating element (10'') is arranged
25 as a spiral.

12. The antenna device according to any of claims 1-10, wherein the radiating element (10') of the

antenna device is provided outside of the edge of a PCB 210 provided in the radio communication device.

13. The antenna device according to any of claims 1-12, wherein the radiating element (10) is provided
5 above a dielectric material.

14. A portable radio communication device comprising an antenna device according to any of the preceding claims.

21
22
23
24
25
26
27
28
29
30

ABSTRACT

An antenna device for a portable radio communication device adapted for receiving radio signals comprises a
5 radiating element (20) comprising feeding portions (21, 22) connectable to a feeding device (40). The radiating element (20) comprises an electrical impedance (30) that is controllable in dependence on the
10 desired frequency range of the received signals. In that way an antenna device can be provided inside the casing of a small sized portable radio communication device, which has good performance throughout a narrow sub-band of a frequency band having a relatively low frequency, wherein the narrow sub-band can be adjusted
15 in frequency so as to cover the entire frequency band, such as the FM radio band.

(FIG. 3)

04
+
1
2
3
4
5
6
7
8
9
0

1/4

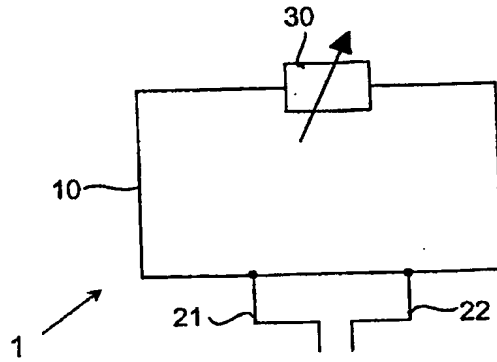


Fig. 1

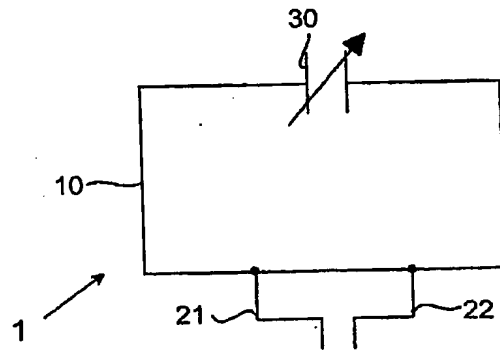


Fig. 2

3/4

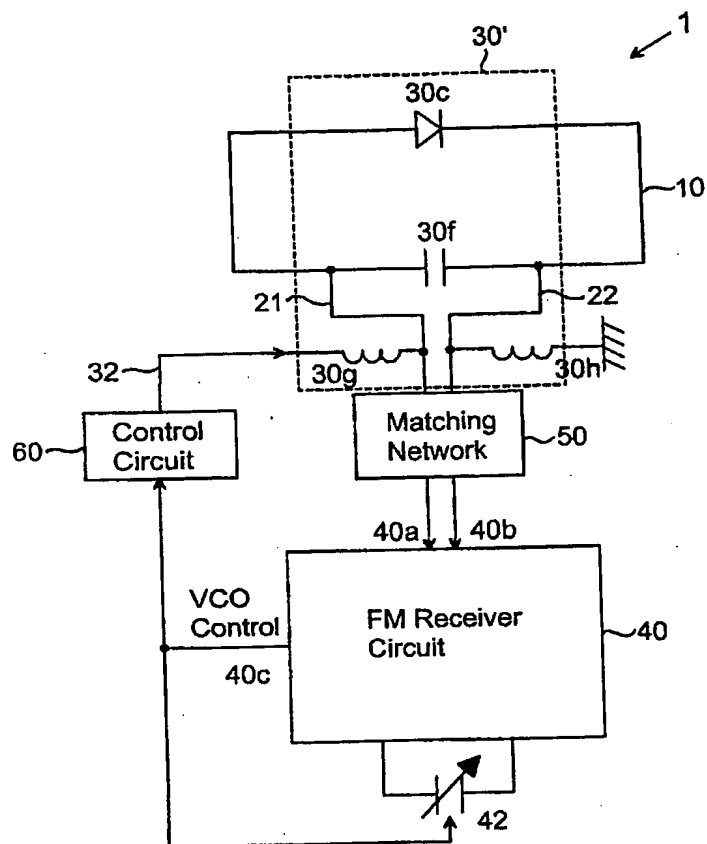


Fig. 4

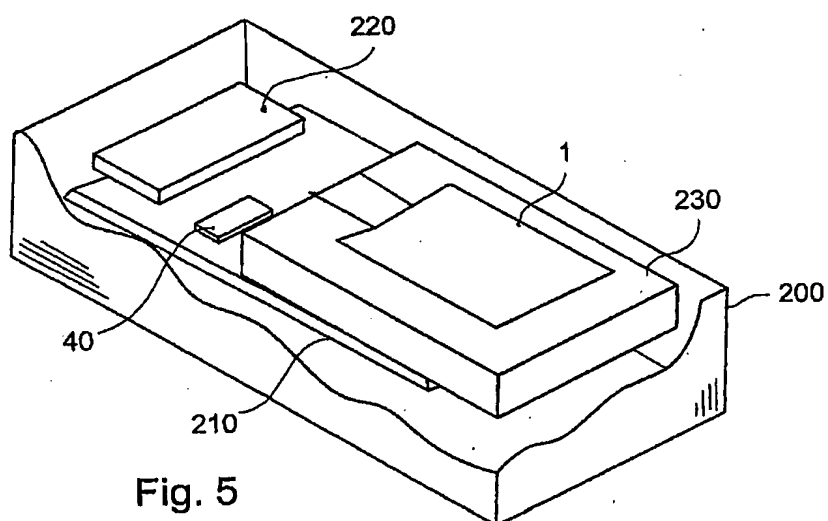


Fig. 5

4/4

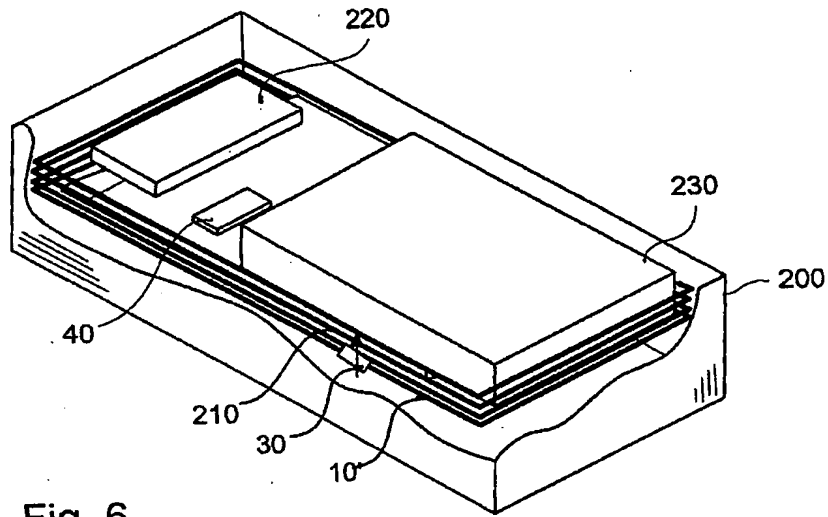


Fig. 6

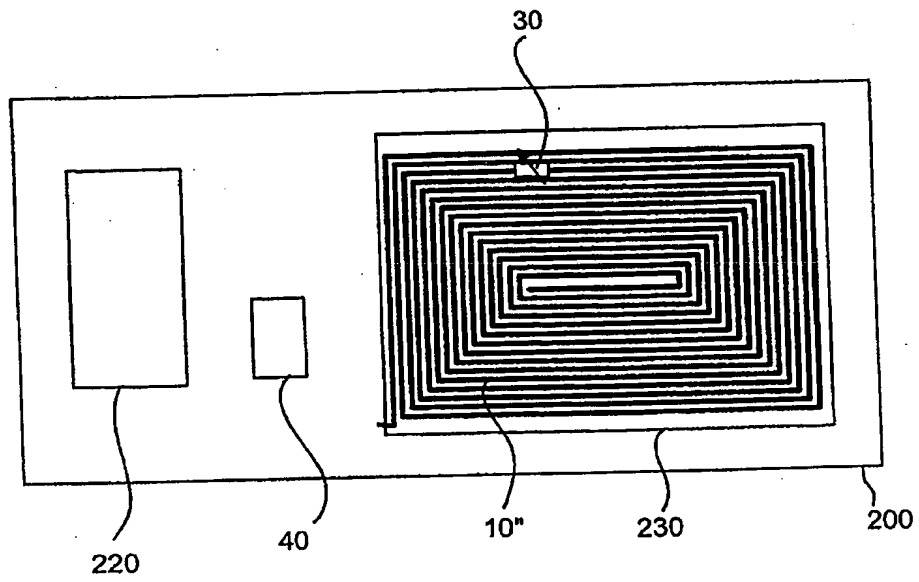


Fig. 7

PATENT COOPERATION TREATY

PCT

INTERNATIONAL PRELIMINARY REPORT ON PATENTABILITY (Chapter I of the Patent Cooperation Treaty)

(PCT Rule 44bis)

Applicant's or agent's file reference 03309PC-LE	FOR FURTHER ACTION	See item 4 below
International application No. PCT/SE2004/001123	International filing date (<i>day/month/year</i>) 09 July 2004 (09.07.2004)	Priority date (<i>day/month/year</i>) 11 July 2003 (11.07.2003)
International Patent Classification (8th edition unless older edition indicated) See relevant information in Form PCT/ISA/237		
Applicant AMC CENTURION AB		

1.	This international preliminary report on patentability (Chapter I) is issued by the International Bureau on behalf of the International Searching Authority under Rule 44 bis.1(a).																								
2.	This REPORT consists of a total of 4 sheets, including this cover sheet. In the attached sheets, any reference to the written opinion of the International Searching Authority should be read as a reference to the international preliminary report on patentability (Chapter I) instead.																								
3.	<p>This report contains indications relating to the following items:</p> <table style="width: 100%;"> <tr> <td style="width: 10%; text-align: center;"><input checked="" type="checkbox"/></td> <td style="width: 30%;">Box No. I</td> <td style="width: 60%;">Basis of the report</td> </tr> <tr> <td style="text-align: center;"><input type="checkbox"/></td> <td>Box No. II</td> <td>Priority</td> </tr> <tr> <td style="text-align: center;"><input type="checkbox"/></td> <td>Box No. III</td> <td>Non-establishment of opinion with regard to novelty, inventive step and industrial applicability</td> </tr> <tr> <td style="text-align: center;"><input type="checkbox"/></td> <td>Box No. IV</td> <td>Lack of unity of invention</td> </tr> <tr> <td style="text-align: center;"><input checked="" type="checkbox"/></td> <td>Box No. V</td> <td>Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement</td> </tr> <tr> <td style="text-align: center;"><input type="checkbox"/></td> <td>Box No. VI</td> <td>Certain documents cited</td> </tr> <tr> <td style="text-align: center;"><input type="checkbox"/></td> <td>Box No. VII</td> <td>Certain defects in the international application</td> </tr> <tr> <td style="text-align: center;"><input type="checkbox"/></td> <td>Box No. VIII</td> <td>Certain observations on the international application</td> </tr> </table>	<input checked="" type="checkbox"/>	Box No. I	Basis of the report	<input type="checkbox"/>	Box No. II	Priority	<input type="checkbox"/>	Box No. III	Non-establishment of opinion with regard to novelty, inventive step and industrial applicability	<input type="checkbox"/>	Box No. IV	Lack of unity of invention	<input checked="" type="checkbox"/>	Box No. V	Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement	<input type="checkbox"/>	Box No. VI	Certain documents cited	<input type="checkbox"/>	Box No. VII	Certain defects in the international application	<input type="checkbox"/>	Box No. VIII	Certain observations on the international application
<input checked="" type="checkbox"/>	Box No. I	Basis of the report																							
<input type="checkbox"/>	Box No. II	Priority																							
<input type="checkbox"/>	Box No. III	Non-establishment of opinion with regard to novelty, inventive step and industrial applicability																							
<input type="checkbox"/>	Box No. IV	Lack of unity of invention																							
<input checked="" type="checkbox"/>	Box No. V	Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement																							
<input type="checkbox"/>	Box No. VI	Certain documents cited																							
<input type="checkbox"/>	Box No. VII	Certain defects in the international application																							
<input type="checkbox"/>	Box No. VIII	Certain observations on the international application																							
4.	The International Bureau will communicate this report to designated Offices in accordance with Rules 44bis.3(c) and 93bis.1 but not, except where the applicant makes an express request under Article 23(2), before the expiration of 30 months from the priority date (Rule 44bis .2).																								

<p style="text-align: center;">The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland</p> <p>Facsimile No. +41 22 740 14 35</p>	<p>Date of issuance of this report 16 January 2006 (16.01.2006)</p> <p>Authorized officer Philippe Becamel</p> <p>Telephone No. +41 22 338 70 90</p>
--	---

PATENT COOPERATION TREATY

From the
INTERNATIONAL SEARCHING AUTHORITY

To:
Kransell & Wennborg AB
Box 27834
11593 Stockholm

PCT

WRITTEN OPINION OF THE
INTERNATIONAL SEARCHING AUTHORITY

(PCT Rule 43bis.1) **REC'D 26 NOV 2004**

Date of mailing
(day/month/year) **22-11-2004**

Applicant's or agent's file reference
03309PC-LE

FOR FURTHER ACTION
See paragraph 2 below

International application No.
PCT/SE 2004/001123

International filing date (day/month/year)
09.07.2004

Priority date (day/month/year)
11.07.2003

International Patent Classification (IPC) or both national classification and IPC
H04B 1/18, H03H 7/38 // H01Q 1/24

Applicant
AMC Centurion AB et al

1. This opinion contains indications relating to the following items:

- ☒ Box No. I Basis of the opinion
- ☐ Box No. II Priority
- ☐ Box No. III Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- ☐ Box No. IV Lack of unity of invention
- ☒ Box No. V Reasoned statement under Rule 43bis.1(a)(i) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- ☐ Box No. VI Certain documents cited
- ☐ Box No. VII Certain defects in the international application
- ☐ Box No. VIII Certain observations on the international application

2. FURTHER ACTION

If a demand for international preliminary examination is made, this opinion will be considered to be a written opinion of the International Preliminary Examining Authority ("IPEA") except that this does not apply where the applicant chooses an Authority other than this one to be IPEA and the chosen IPEA has notified the International Bureau under Rule 66.1bis(b) that written opinions of this International Searching Authority will not be so considered.

If this opinion is, as provided above, considered to be a written opinion of the IPEA, the applicant is invited to submit to the IPEA a written reply together, where appropriate, with amendments, before the expiration of 3 months from the date of mailing of Form PCT/ISA/220 or before the expiration of 22 months from the priority date, whichever expires later.

For further opinions, see Form PCT/ISA/220.

3. For further details, see notes to Form PCT/ISA/220.

Name and mailing address of the ISA/SE
Patent- och registreringsverket
Box 5055
S-102 42 STOCKHOLM
Facsimile No. +46 8 667 72 88

Authorized officer

Rune Bengtsson /OGU

Form PCT/ISA/237 (cover sheet) (January 2004)

CORRECTED

WRITTEN OPINION OF THE
INTERNATIONAL SEARCHING AUTHORITY

International application No.
PCT/SE 2004/001123

Box No. I Basis of this opinion

1. With regard to the language, this opinion has been established on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.
☐ This opinion has been established on the basis of a translation from the original language into the following language _____, which is the language of a translation furnished for the purposes of international search (under Rules 12.3 and 23.1(b)).
2. With regard to any nucleotide and/or amino acid sequence disclosed in the international application and necessary to the claimed invention, this opinion has been established on the basis of:
 - a. type of material
☐ a sequence listing
☐ table(s) related to the sequence listing
 - b. format of material
☐ in written format
☐ in computer readable form
 - c. time of filing/furnishing
☐ contained in the international application as filed.
☐ filed together with the international application in computer readable form.
☐ furnished subsequently to this Authority for the purposes of search.
3. ☐ In addition, in the case that more than one version or copy of a sequence listing and/or table relating thereto has been filed or furnished, the required statements that the information in the subsequent or additional copies is identical to that in the application as filed or does not go beyond the application as filed, as appropriate, were furnished.
4. Additional comments:

WRITTEN OPINION OF THE
INTERNATIONAL SEARCHING AUTHORITY

International application No.
PCT/SE 2004/001123

Box No. V Reasoned statement under Rule 43bis.1(a)(i) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Statement

Novelty (N)	Claims	1-14	YES
	Claims		NO
Inventive step (IS)	Claims	1-14	YES
	Claims		NO
Industrial applicability (IA)	Claims	1-14	YES
	Claims		NO

2. Citations and explanations:

Documents cited in the International Search Report:

D1: Patent Abstract of Japan, abstract of JP 06314982
D2: US 6509875 B1
D3: US 4984296 A
D4: Patent Abstract of Japan, abstract of JP 08288865
D5: WO 0189036 A1

The cited documents represent the general state of the art.
The invention defined in claims 1-14 is not disclosed by
any of these documents.

The cited prior art does not give any indication that would
lead a person skilled in the art to the claimed antenna
device and portable radio communication device comprising
such antenna device. Therefore, the claimed invention is
not obvious to a person skilled in the art.

Accordingly, the invention defined in claims 1-14 is novel
and is considered to involve an inventive step. The
invention is industrially applicable.